


## ICY BOX IB-M2TP02-7

### High-Performance Thermal Pad for M.2 SSD

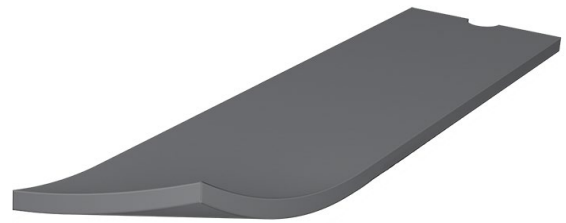

#### Key features

- 2x thermal pad with 0.75 mm and 1.75 mm thickness
- Ensures perfect connection between M.2 SSD and heat sink
- Thermal conductivity of 7.5 W/mK for ideal heat dissipation from SSD to heat sink
- Suitable for M.2 SSD 22x 80 mm
- Withstands operating temperatures from -40°C – 180°C
- Easy installation

#### Packing content


IB-M2TP02-7 (2x thermal pad), Manual

The perfect link between M.2 SSD and heat sink. The heat conduction pads in a double pack are available in thicknesses of 0.75 mm and 1.75 mm and are ideally suited for the high-performance sector. With a specific thermal conductivity of 7.5 W/mK, the waste heat of the M.2 SSD can be efficiently transferred, thus ensuring an optimal operating temperature of the M.2 SSD. With 20 x 74 mm, the pads fit the M.2 standard size 22x 80 mm and are therefore suitable for almost all M.2 SSDs.


#### Technical data

<b>Model</b>	IB-M2TP02-7
<b>Article no.</b>	60971
<b>EAN code</b>	4250078173052
<b>Brand</b>	ICY BOX
<b>Colour</b>	Grey
<b>Material</b>	Silicone
<b>M.2 card size / mm</b>	22 x 80
<b>Cooling</b>	Passive

<b>Thermal conductivity</b>	Up to 7.5 W/mK
<b>Volume Resistivity / Ω-cm</b>	$7.13 \times 10^{12}$
<b>Density / g/cm<sup>3</sup></b>	3.5
<b>Operating temperature</b>	-40°C – 180°C
<b>System requirements</b>	One M.2 SSD 22x 80 mm

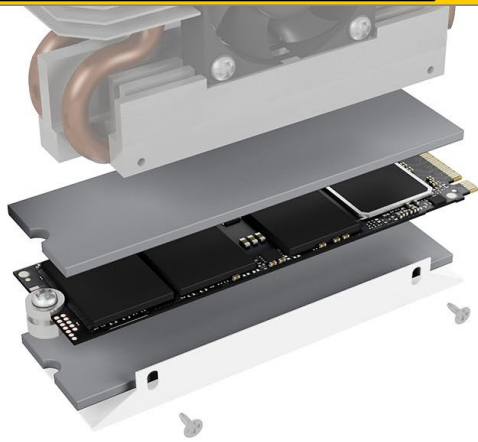


## ICY BOX **IB-M2TP02-7** High-Performance Thermal Pad for M.2 SSD

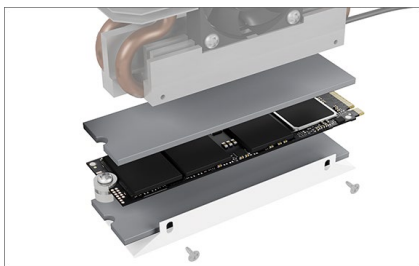


### Holds together

The two IB-M2TP02-7 thermal pads connect the M.2 SSD and the heat sink perfectly and are both powerful and durable. With a specific thermal conductivity of 7.5 W/mK and an operating temperature range of -40°C - 180°C, all application areas are covered.

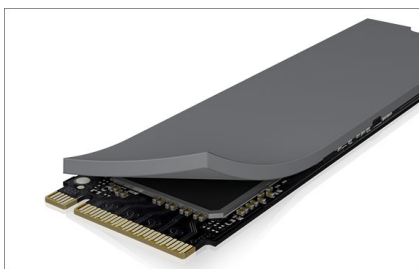

### Perfectly sized

Most M.2 SSDs that are installed have a size of 22x 80 mm (2280 M.2 SSD). Our thermal pads with the dimensions 22x 74 mm therefore fit best for the most common standard size. With IB-M2TP02-7 you also get two different thicknesses: 0.75 mm and 1.75 mm.

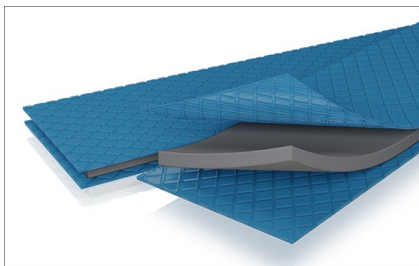

### Easily installed

Two carrier foils, thumb and index finger. That's all it takes to put the thermal pad in position. This makes installation quick and easy.

#### Logistical data

**Packing unit:** 250 pcs./carton  
**Total weight:** 9.62 kg  
**Gross weight:** (with packing): 0.036 kg  
**Net weight:** 0.014 kg

**Dimension/Carton:** 500x230x310 mm  
**Dimension (with packing):** 10x100x110 mm  
**Dimension of article:** 74x20x1 mm  
**Country of Origin:** China