


Schneider Electric

NetShelter SX 45U 600mm WIDE X 1070mm DEEP ENCLOSURE WITH SIDES MAIN MECHANICAL		DWG NO:	R3	105	REV. O
		DRAWN BY:	JAYAPRAKASH	31-0CT-11	FIRST
		ENGINEER:	JACK LU	3-NOV-11	ANGLE
JECT: SUBMITTAL DRAWINGS	SHEET 1 OF 3	APPROVED BY:	SCOTT VOCCIO	3-N0V-11	PROJECTION

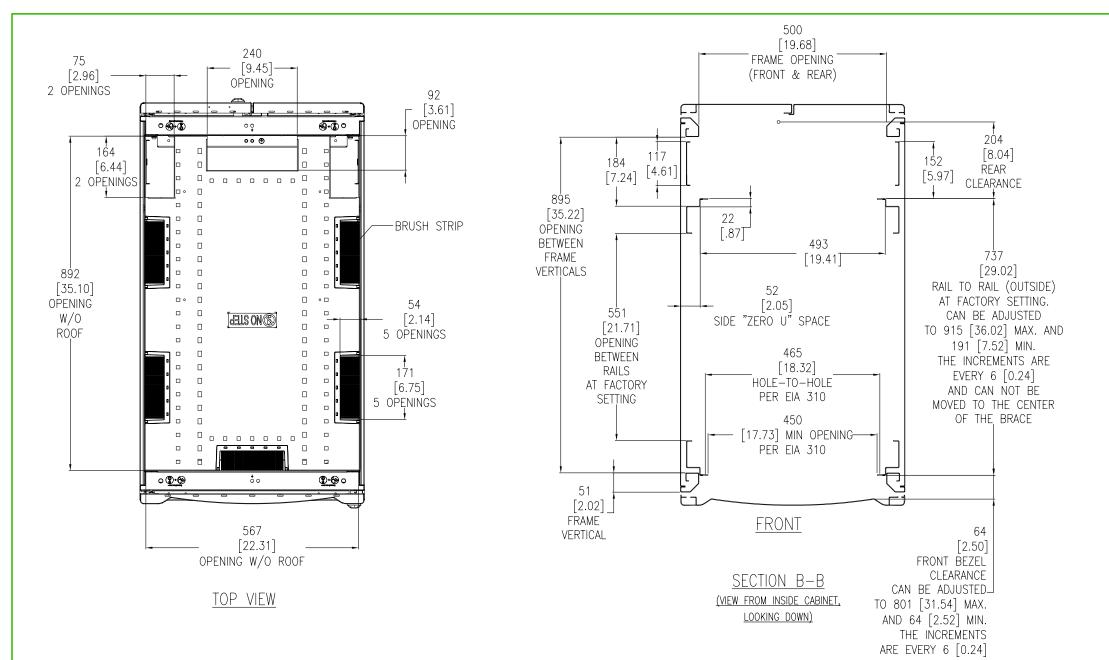


## NOTES:

- 1. INSTALLATION MUST COMPLY WITH NATIONAL AND LOCAL ELECTRICAL REGULATIONS.
- 2. PLEASE REFER TO THE PRODUCT MANUALS FOR ADDITIONAL DETAILS.
- 3. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS [INCHES].4.




ITILE: NetShelter SX 45U 600mm WIDE X 1070mm DEEP ENCLOSURE WITH SIDES TOP VIEW & SECTION VIEW
PROJECT: SUBMITTAL DRAWINGS SHEET 2 OF

	DWG NO:	R3	105	REV. O
	DRAWN BY:	JAYAPRAKASH	31-0CT-11	FIRST
	ENGINEER:	JACK LU	3-N0V-11	ANGLE
3	APPROVED BY:	SCOTT VOCCIO	3-NOV-11	PROJECTION

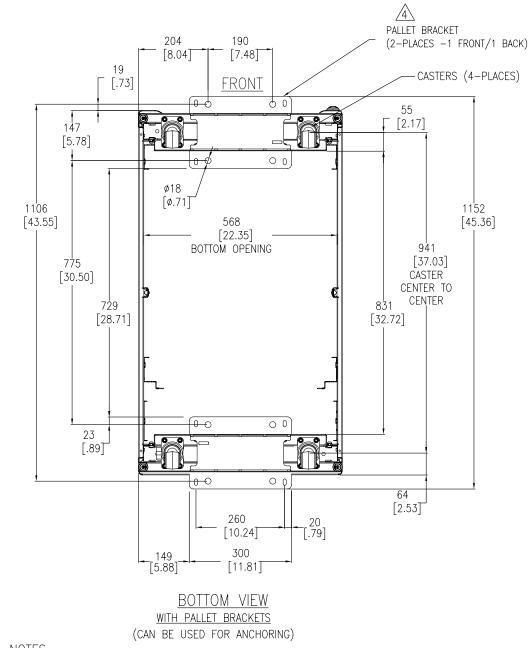

## NOTES:

- 1. INSTALLATION MUST COMPLY WITH NATIONAL AND LOCAL ELECTRICAL REGULATIONS.
- 2. PLEASE REFER TO THE PRODUCT MANUALS FOR ADDITIONAL DETAILS.
- 3. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS [INCHES].
- Δ4. ANCHORING CAN BE INSTALLED EITHER INSIDE OR OUTSIDE THE NetShelter WITH ONE AT FRONT AND ONE IN BACK.
- △5. BOLT-DOWN KIT (SKU# AR7701) IS OPTIONAL AND HAS TO BE ORDERED SEPARATELY.

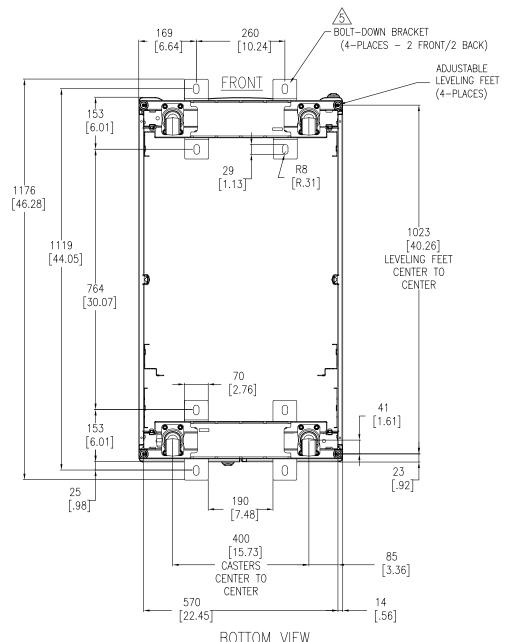

BOTTOM VIEW

(WITH OPTIONAL BOLT-DOWN BRACKETS
FOR ANCHORING)

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF SCHNEIDER ELECTRIC AND SHALL NOT BE COPIED, REPRODUCED OR USED IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF TIEMS WITHOUT WRITTEN PERMISSION FROM SCHNEIDER ELECTRIC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.



TITLE: NetShelter SX 45U 600mm WIDE X 1070mm DEEP ENCLOSURE WITH SIDES BOTTOM VIEWS				
PROJECT: SUBMITTAL DRAWINGS	SHEET 3 OF 5			

DWG NO:	R3	105	REV. O
DRAWN BY:	JAYAPRAKASH	31-0CT-11	FIRST
ENGINEER:	JACK LU	3-N0V-11	ANGLE
APPROVED BY:	SCOTT VOCCIO	3-NOV-11	PROJECTION