

ASRock®

RYZEN
AMD




NEW

DeskMini X300

SERIES


The specification is subject to change without notice.
The brand and product names are trademarks of their respective companies.
Any configuration other than the original product specification is not guaranteed.

AMD
SOCKET
AM4 | X300

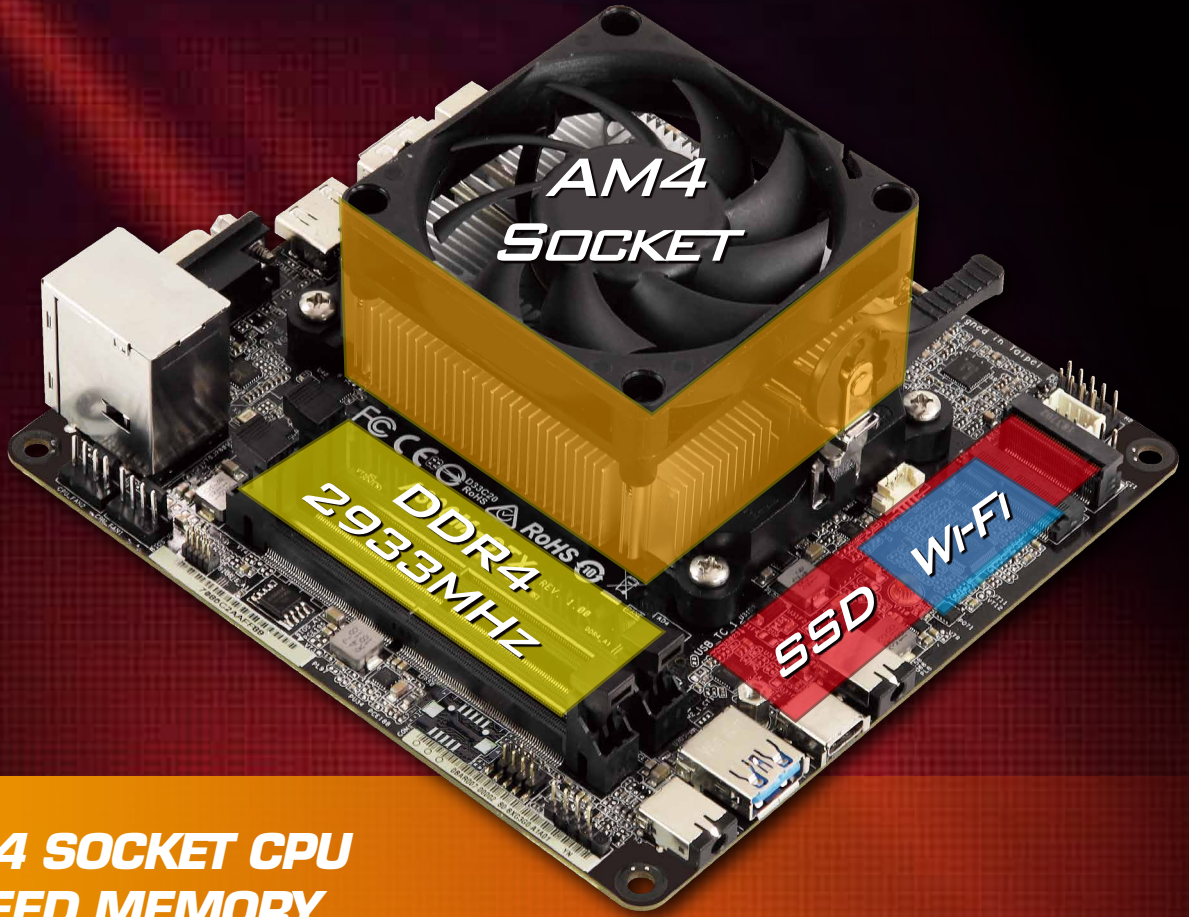


AMD AM4 SOCKET CPU
HIGH SPEED MEMORY
CPU COOLER MAX HEIGHT ≤ 46MM

CPU OC ◀
GPU OC ◀
Voltage Adj. ◀

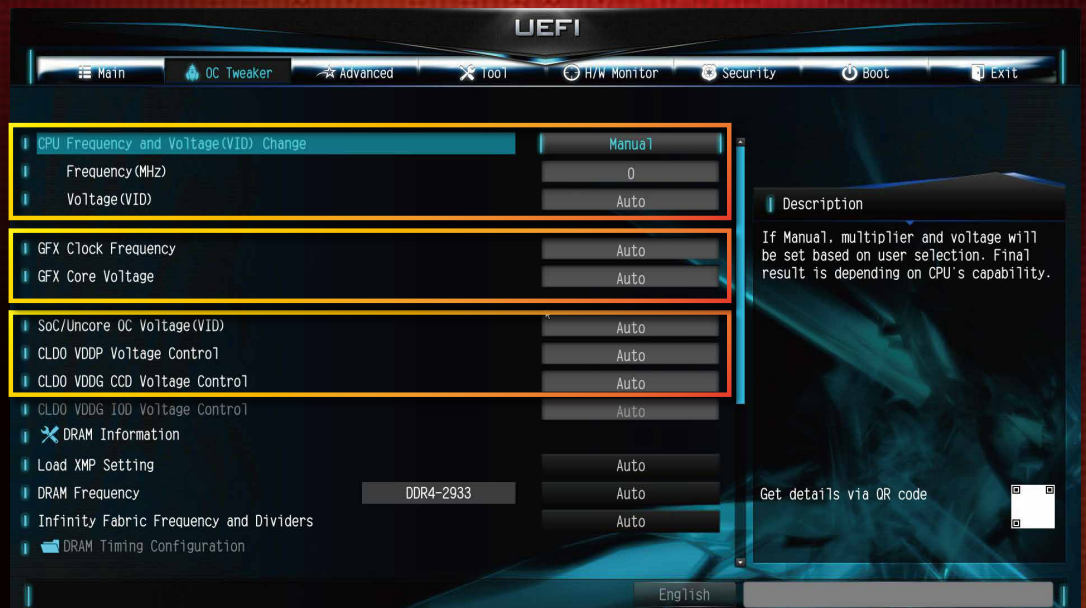

RELEASE POTENTIAL WITH X300
CPU & GPU OVERCLOCKING
VOLTAGE ADJUSTMENT

Dual 2280 M.2 Slots

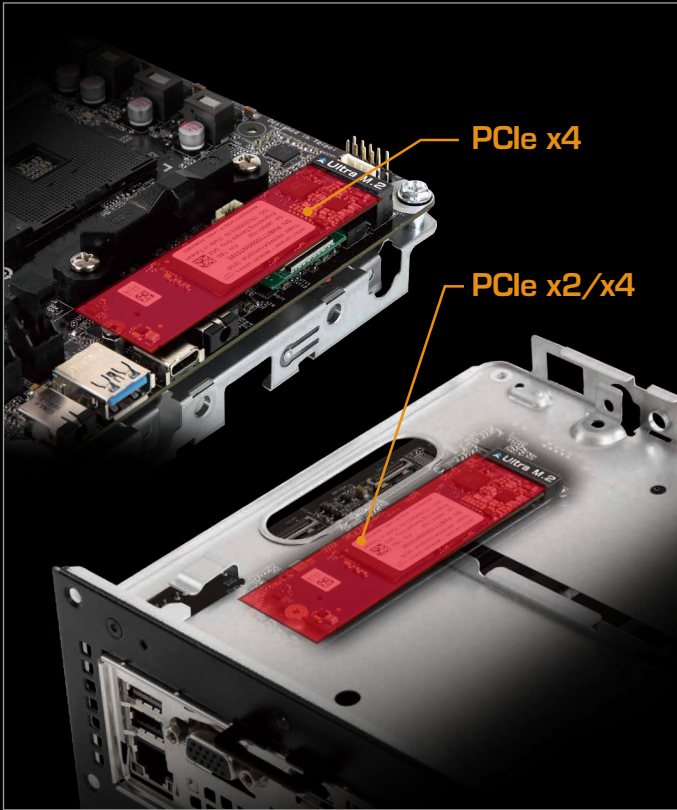


Dual SATA 6Gb (RAID 0/1)



Triple Display



USB Type-C

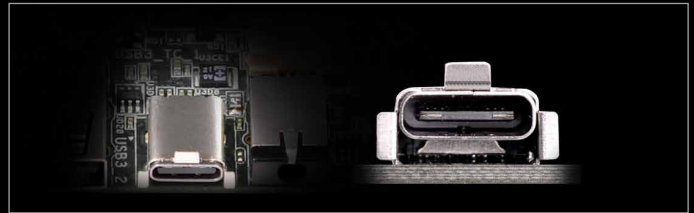

OPTIONAL ACCESSORIES



DeskMini X300

DeskMini X300W

CPU	Supports AMD AM4 Socket CPUs (Renoir, Picasso, Raven Ridge, up to 65W)	Supports AMD AM4 Socket CPUs (Renoir, Picasso, Raven Ridge, up to 65W)
Motherboard	X300M-STX	X300M-STX
Memory	Supports 2 x SO-DIMM DDR4-2933MHz, Max. 64GB	Supports 2 x SO-DIMM DDR4-2933MHz, Max. 64GB
Graphics	HDMI (4K @60Hz), DisplayPort, D-Sub	HDMI (4K @60Hz), DisplayPort, D-Sub
Wi-Fi	1 x M.2 (key E 2230) Slot for Wi-Fi + BT Module	1 x M.2 (key E 2230) Slot for Wi-Fi + BT Module
Storage	2 x SATA3 with Power connectors (RAID 0/1) 1 x Ultra M.2 (2280) PCIe Gen3 x4 SSD Slot 1 x Ultra M.2 (2280) Slot PCIe Gen3 x4 (Renoir, Picasso and Raven Ridge APU) PCIe Gen3 x2 (Athlon series APU)	2 x SATA3 with Power connectors (RAID 0/1) 1 x Ultra M.2 (2280) PCIe Gen3 x4 SSD Slot 1 x Ultra M.2 (2280) Slot PCIe Gen3 x4 (Renoir, Picasso and Raven Ridge APU) PCIe Gen3 x2 (Athlon series APU)
Audio	1 x Head Phone with MIC Jack, 1 x MIC-In (Realtek ALC233)	1 x Head Phone with MIC Jack, 1 x MIC-In (Realtek ALC233)
USB	Rear: 1 x USB 2.0 Type-A, 1 x USB 3.2 Gen1 Type-A Front: 1 x USB 3.2 Gen1 Type-C, 1 x USB 3.2 Gen1 Type-A	Rear: 1 x USB 2.0 Type-A, 1 x USB 3.2 Gen1 Type-A Front: 1 x USB 3.2 Gen1 Type-C, 1 x USB 3.2 Gen1 Type-A
LAN	Gigabit LAN (Realtek RTL8111H)	Gigabit LAN (Realtek RTL8111H)
Onboard Headers	1 x USB 2.0 Header 1 x Front Panel Header 2 x 4-Pin fan connectors (CPU, SYS) 1 x DC-In Jack (Supports 19V Power Adapters) 1 x Internal Speaker Header (4-Pin) 1 x Chassis Intrusion Header (2-Pin) 1 x Audio Header (4-Pin)	1 x USB 2.0 Header 1 x Front Panel Header 2 x 4-Pin fan connectors (CPU, SYS) 1 x DC-In Jack (Supports 19V Power Adapters) 1 x Internal Speaker Header (4-Pin) 1 x Chassis Intrusion Header (2-Pin) 1 x Audio Header (4-Pin)
Accessories	2 x SATA Data with Power Cable 1 x 120W/19V adapter 1 x Screws Pack	2 x SATA Data with Power Cable 1 x 120W/19V adapter 1 x Screws Pack 1 x Intel AC-3168 Wi-Fi Kit
Dimensions	155 x 155 x 80 mm (1.92L)	155 x 155 x 80 mm (1.92L)