



ICY BOX IB-AC538a

Mini DisplayPort™ to HDMI® Adapter

Key features

- Mini DisplayPort™ (male) to HDMI® (female)
- Compliant with DisplayPort™ specification V1.1
- Resolution of up to 1920x1200@60 Hz
- Compact case
- Plug & Play
- Compatible to iMac/MacBook series



Packing content

1x IB-AC538a, 1x manual

Full HD is a given


The input for the IB-AC538a is the Mini DisplayPort™ and the adapter outputs the video signal via HDMI® with a resolution of up to 1920x1200@60 Hz. This means that MacBook® and co. can also be connected via HDMI®.

Technical data

Model	IB-AC538a	Output	HDMI® Type-A
Article no.	60851	length of cable	15 cm
EAN code	4250078171874	Plug & Play	Yes
Brand	ICY BOX	Audio	Yes
Colour	Black	Resolution HDMI	Up to 1920x1200@60Hz
Material	Plastic	Power supply	Bus-powered
Resolution	Up to 1920x1200@60Hz	Operating system	Windows®, macOS®
Interface to host computer	Mini DisplayPort™		




ICY BOX IB-AC538a Mini DisplayPort™ to HDMI® Adapter

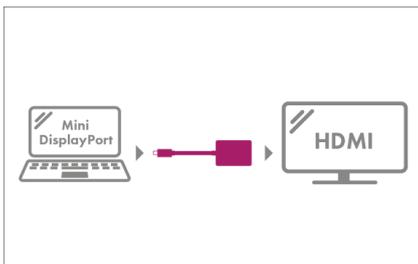

Ultrabook = ultra light, but...

Where does the weight loss come from? By losing or reducing the size of some widely used interfaces. If you used to be able to connect a larger screen via HDMI® using a DisplayPort™ with an adapter, now you may only have a Mini DisplayPort™, so what do you do?

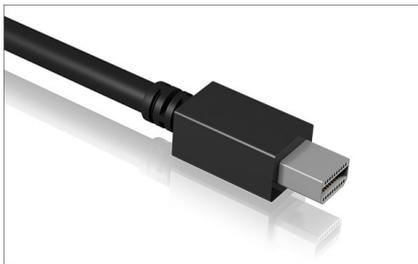

Mini DisplayPort™

The input is given via a Mini DisplayPort™. This connection has become particularly established with Mac-Book Air®, not least because Apple® developed it. So anyone who owns such a MacBook® can benefit from our IB-AC538a adapter.



HDMI®

The HDMI® connection can be used, for example, to connect the MacBook® to a beamer/projector or another monitor. HDMI® is widely used and supports a resolution of up to 1920x1200@60 Hz.

Logistical data

Packing unit: 50 pcs./carton
Total weight: 5.80 kg/carton
Gross weight: (with packing): 0.098 kg
Net weight: 0.026 kg

Dimension/carton: 420x400x235 mm
Dimension (with packing): 27x102x200 mm
Dimension of article: 146x43x12 mm
Country of origin: China