**IB-DK2252AC****Order Number**

60797

EAN Code

4250078171331

DisplayLink® Notebook DockingStation with dual video output

Notebooks are much more practical than desktop PCs because of their portability - you can't lug a desktop PC around between your home and office. However, the limitation of the notebook is the screen size and often a lack of ports. Some notebooks come standard with only one or two ports, one of which you need for charging. Many people prefer a mouse to the notebook's trackpad or even a full-size keyboard. The perfect setup would be a notebook for flexibility on the one hand and more ports on the other. The solution is an **ICY BOX®** DockingStation that includes all these ports and to which you can connect your notebook with only one cable.

**Host**Supports
USB Type-A,
USB Type-C®**Multiple Display**


Supports 2x 4K@60 Hz

**USB interfaces**6x USB 3.0 Type-A
with up to 5 Gbit/s**Headset**


3.5 mm combo jack

**LAN Port**RJ 45
Gigabit Ethernet**DisplayLink®**Driver installation required
before first use
www.displaylink.com/downloads

FRONT VIEW

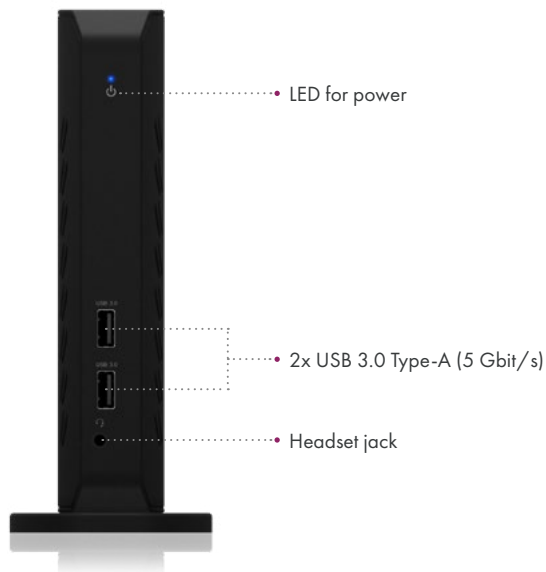

REAR VIEW

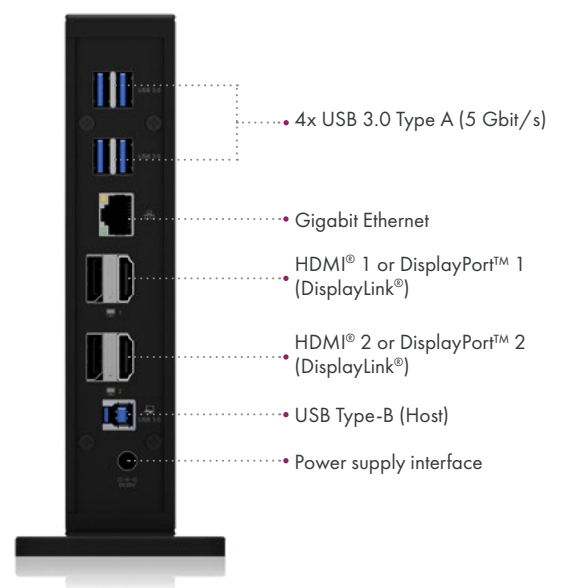

SPECIAL FEATURES




The more, the better!

A DockingStation with a variety of connections is a real added value for a notebook that, after using the charging port, may only have one more port left for further applications. With the IB-DK2252AC you can, for example, connect a mouse, a full-size keyboard, you can connect one or more larger external displays, connect external hard drives or a printer via USB ports and also enjoy stable internet via the Ethernet port.



Convective heat dissipation

This DockingStation model is designed for vertical positioning with the help of a stand. Both enclosure surfaces have ventilation slots that allow convective heat dissipation during operation: The heat generated during operation is dissipated at the top, while cooler air is drawn in from below through the vents and cools the enclosure, and as a result the heated air escapes again through the top vents.

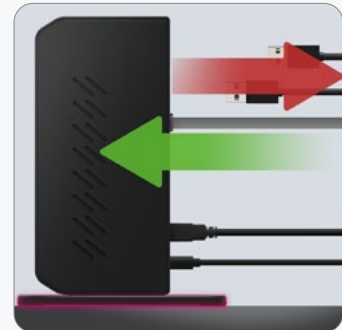

With one foot firmly on the ground

ICY BOX has a wide variety of dock designs in its portfolio: flat, horizontally lying models, those that are placed under a notebook in a wedge shape for ergonomic working or those that are equipped with a stand like this IB-DK2252AC. The stand gives the device a secure hold - even when plugging in and unplugging cables - and in this case enables the upright DockingStation to have effective cooling qualities!

PACKING CONTENT

- ▶ 1x IB-DK2252AC
- ▶ 1x Wall power supply with EU, UK, US adapter
- ▶ 1x USB Type-B to Type-A/Type-C® cable
- ▶ 1x Manual

PRODUCT FEATURES

Colour	Material	UASP support	Plug & Play	LED	Cooling	Power supply
Black	ABS, plastic, metal	Yes	Yes	Power	Passive	External power supply AC 100-240 V; 50/60 Hz; DC 20 V/2 A; 40 W

VIDEO CONNECTION AND DISPLAY OUTPUT MATRIX

Video matrix design (USB 3.0 DisplayLink®, maximum resolutions)				
	INPUTS (PLUG-IN) DOCK		OUTPUT	
Number of displays	HDMI® or DP 1	HDMI® or DP 2	Display 1	Display 2
Dual video output	✓	✓	3840x2160@60 Hz	3840x2160@60 Hz
Single video output		✓		3840x2160@60 Hz
	✓		3840x2160@60 Hz	
	DP 1	DP 2	5120x2880@60 Hz	

SYSTEM REQUIREMENTS

Supported Operating Systems	Host compatibility
Windows® / macOS® / Chrome OS™	USB 3.0 Type-A / USB Type-C® / Thunderbolt™ 3 Type-C®

HOST CONNECTION ON THE DOCKINGSTATION

Port	Position	Version & transfer rate	Features
1x USB Type-B	Rear	USB 3.0 (5 Gbit/s)	USB data transfer

USB CONNECTIONS

Port	Position	Version & transfer rate	Voltage	Amperage	Wattage
2x USB Type-A	Front	USB 3.0 (5 Gbit/s)	5 V	900 mA	4.5 Watt
4x USB Type-A	Rear	USB 3.0 (5 Gbit/s)	5 V	900 mA	4.5 Watt

FURTHER INPUTS/OUTPUTS

Port	Position	Features
Audio in/out	Front	3.5 mm TRRS speaker/microphone combo jack
RJ45	Rear	10/100/1000 BASE-T Gigabit Ethernet

SECURITY

n/a

LOGISTICAL DATA

Packing unit	Total weight	Gross weight (with packing)	Net weight	Dimension/ carton	Dimension (with packing)	Dimension/ article	Country of origin
6 pcs./carton	5.80 kg	0.967 kg	0.346 kg	230x325x350 mm	142x210x112 mm	40x185x90 mm	Thailand

DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries.

DisplayLink® is the registered trademark of DisplayLink Corp. in the EU, the US, and other countries.

The terms HDMI® and HDMI® High-Definition Multimedia Interface, and the HDMI® logo are trademarks or registered trademarks of HDMI® LA, Inc. in the United States and other countries.

Apple and macOS, MAC, iTunes and Macintosh are registered trademarks of Apple Computer Inc.

Microsoft, Windows and the Windows logo are registered trademarks of Microsoft Corporation.

Chrome OS is a trademark of Google Inc. Use of this trademark is subject to Google Permissions.

USB Type-C® and USB-C® are registered trademarks of USB Implementers Forum.

All other trademarks and brand names are the Property of their respective owners.

For support please contact: support@raidsonic.de
For orders please contact: info@raidsonic.de