IB-DK4022a-CPD

6-in-1 USB Type-C®
Notebook DockingStation

Article no.	EAN code
61142	4250078174769

The IB-DK4022a-CPD is a 6-in-1 USB Type-C® DockingStation designed for easy travel. Constructed from aluminium, it is both lightweight and durable, making it the perfect companion for your on-the-go lifestyle. This DockingStation delivers a 4K quality display through the HDMI® port and enables quick data transfer through four USB Type-A interfaces. With its simple Plug & Play feature, you can stay connected wherever and whenever you are. Whether you're in a coffee shop or at a client meeting, this DockingStation ensures you have all the necessary ports at your fingertips.

Host
Supports USB 3.2
Gen 1 Type-C®

Display
1x HDMI® up to
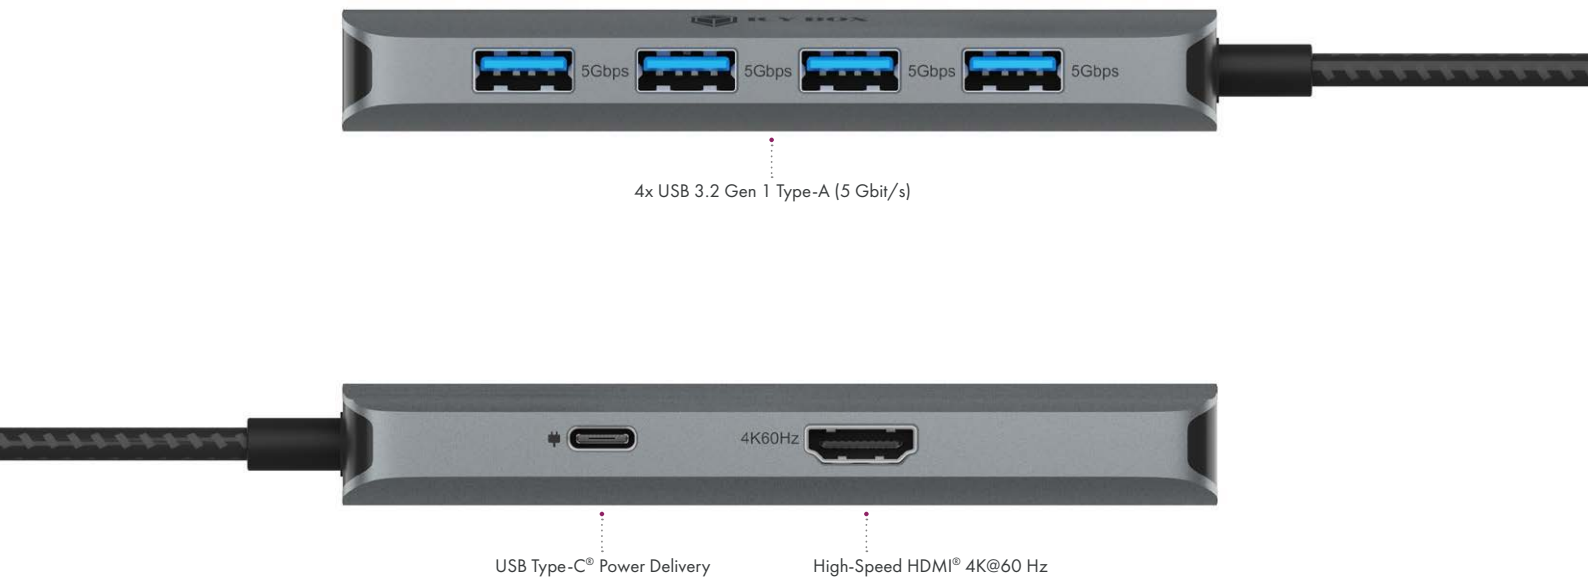4K@60 Hz

USB interfaces
4x USB 3.2 Gen 1 Type-A

Power Delivery
USB Type-C® PD 3.0
up to 100 W

Data transfer
USB 3.2 Gen 1 Type-A
up to 5 Gbit/s

VIEWS

4x USB 3.2 Gen 1 Type-A (5 Gbit/s)

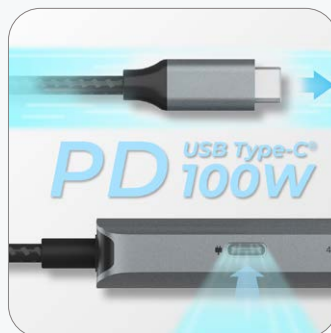USB Type-C® Power Delivery · · · · · · High-Speed HDMI® 4K@60 Hz

KEY FEATURES

Multi-connectivity options

With a single HDMI® output sup-porting 4K@60 Hz resolution, the IB-DK4022a-CPD offers high picture quality. Additionally, four USB Type-A ports also provide connectivity for multiple devices to operate at the same time with a transfer rate of up to 5 Gbit/s.

High-powered performance

The IB-DK4022a-CPD features an integrated USB Type-C® host con-nector, eliminating the need for ex-tra cables. It also includes a USB Type-C® port with Power Delivery 3.0, providing up to 100 watts of po-wer. This allows your device to recei-ve sufficient power without requiring an additional power cable.

Travel partner

Combining premium build qua-lity with broad compatibility, the IB-DK4022a-CPD is a reliable part-ner for travelers. Its aluminium alloy enclosure provides effective heat dis-sipation and durability for long-term use. The IB-DK4022a-CPD is also compatible with both Windows® and macOS®, making it easy to integrate with a variety of devices and environ-ments.

RaidSonic Technology GmbH · Kurt-Fischer-Straße 50 · 22926 Ahrensburg · Germany
Phone +49 4102 4689-00 · **E-Mail** info@raidsonic.de

Visit us:
www.icybox.de/en/

VERPACKUNGSINHALT

▶ 1x IB-DK4022a-CPD
▶ 1x Manual

PRODUCT FEATURES

Colour	Material	UASP support	Cable length	Video technology
Silver/black	Aluminium/ABS+PC	Yes	20 cm (integrated)	DisplayPort Alt Mode

VIDEO CONNECTION AND DISPLAY OUTPUT MATRIX

Video matrix, maximum resolutions		
	Input (plug-in)	**Output**
Number of displays	**HDMI®**	**HDMI®**
Single video output	✓	3840x2160@60 Hz

SYSTEM REQUIREMENTS

Supported Operating Systems	Host compatibility
Windows®/macOS®	USB Type-C® has to support DisplayPort Alt Mode for HDMI® Power supply is not included

INTERFACE TO HOST COMPUTER

Port	Position	Version & transfer rate	Features
1x USB Type-C®	Right side (integrated cable)	USB 3.2 Gen 1 (5 Gbit/s)	Supports PD 3.0 up to 20 V/5 A (100 watts)

ICY BOX®

USB CONNECTIONS

Port	Position	Version & transfer rate	Wattage
4x USB Type-A	Front	USB 3.2 Gen 1 (5 Gbit/s)	<2 W

FURTHER IN-/OUTPUTS

Port	Position	Features	Wattage
1x USB Type-C®	Rear	Power Delivery 3.0	Up to 100 watts

NEW USB NOMENCLATURE

Legacy USB Standards	Current USB Standards	Data transfer rate
USB 3.0 = USB 3.1 (Gen 1)	= USB 3.2 Gen 1	= 5 Gbit/s
USB 3.1 = USB 3.1 (Gen 2)	= USB 3.2 Gen 2	= 10 Gbit/s
USB 3.2 (Gen 2x2)	= USB 3.2 Gen 2x2	= 20 Gbit/s
	= USB4® Gen 2x1	= 10 Gbit/s
	= USB4® Gen 2x2	= 20 Gbit/s
	= USB4® Gen 3x2	= 40 Gbit/s

LOGISTIC DATA

Packing unit	Total weight	Gross weight (with packing)	Net weight	Dimension/ carton	Dimension (with packing)	Dimension of article	Country of origin
60/carton	10.32 kg	0.14 kg	0.08 kg	450x290x340 mm	200x100x30 mm	45x113x15 mm	China

For support please contact us via: support@raidsonic.de
For orders please contact us via: info@raidsonic.de